



EDU3


Enrichment & Desorption Unit

Trap & Thermal Desorption for the air analysis

EDU3 is a fully-automated enrichment and thermal desorption unit, which is used for air analysis or for sample preparation. **EDU3** can help concentrate substances or perform a selection from certain substances for subsequent analysis.

The standalone instrument moves through the cycles using the software side access to the analysis parameters, the selectivity and sensitivity can be increased. The whole process can be specifically adjusted to the target substances by using different adsorbents and parameters. As a result enrichment factor between 10 and 1000 are achieved.

Due to its internal flow path system, the device can be easily connected to different detectors. It can be used as a stand-alone unit or in combination with a headspace sampler. Special versions are available which are compatible with common laboratory GCs, Micro-GCs and mass spectrometers.

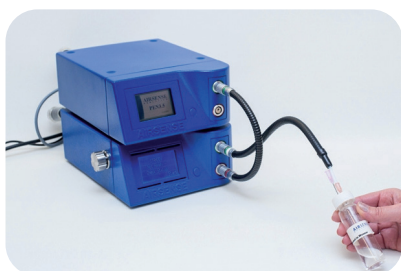

Laboratory
equipment



Applications

- Detection of odors in natural gases
- Proof of solvents in the workplace
- Investigation of pharmaceutical aerosols

Advantages

- Increased selectivity
- Better detection limits
- Portable instrument
- Automatic cycles
- Easy replacement of the adsorbent tube with bayonet lock
- Computer supported or standalone mode



EDU3

Enrichment & Desorption Unit

Technical Data

Product Description

Inlet Sampler	Made of stainless steel and Teflon®, heated up to 150°C, special fluidic and electrical connector
Inlet Detector	Made of stainless steel, heated up to 150°C, special fluidic and electrical connector; different types of installation of detectors
Sample flow	Adjustable, 50ml/min to 500ml/min
Flow system	Internal pump for sampling; internal multiport valve, heated
Temperature adjustable	Sampling: typically 30°C Desorption: up to 250°C Cleaning: up to 280°C
Adsorbent	Different adsorbent materials available, depending on the application
Tube holder	Holder for one adsorbent tube
Measurement time	Typical: 10 minutes for full cycle
Cycle operation	Single or continuous cycle
Display	Text display
Dimension	255 x 190 x 92 mm
weight	2.3 kg

Environment Requirements

Temperature	typically: 0°C to 45°C
Humidity (relative)	5 % to 95 %, non-condensing

Power Requirements

Main power	Power supply: 110 to 230VAC; max 80W or 12VDC (optional)
------------	--

Communications

Computer interface	USB port or serial RS-232 (optional)
Electrical interface	TTL & Relays or connection to analytical equipment or other peripherals

System Requirements

Operating system	Windows XP, Vista, Windows 7
Software	TTD-Terminal for the full cycle: sampling, post sampling, desorption, injection, cleaning and cooling

Options

Safety Class

Warranty

Headspace-Autosampler	Compliant to EN292 part 1 & 2, EN294, EN61010-1, EN1050, EN60204-1, EN55011 G1 CB, EN50270, EN61326	12 months
-----------------------	---	-----------

